CR-DIG5202/04C1-S, CR-DIG5202/04C2-S, CR-DIG5206CH-S, CR-DIG5207SP-S

Flush mounted discussion unit

Flush mounted discussion chairman unit
CR-DIG5202C1-S

Flush mounted discussion delegate unit
CR-DIG5204C1-S

Flush mounted voting chairman unit
CR-DIG5202C2-S

Flush mounted voting delegate unit
CR-DIG5204C2-S

Flush mounted channel selection unit
CR-DIG5206CH-S



Flush mounted speaker
CR-DIG5207SP-S

Product overview

According to the application requirements of different occasions, the II generation embedded unit of full digital conference system can choose to be used alone or be used in combination,beautiful appearance with capacitive touch buttons instead..
CR-DIG5202/4C1-S is the flush mounted discussion unit.
CR-DIG5202/4C2-S is the flush mounted voting unit.
CR-DIG5206CH-S is the flush mounted channel selection unit.
CR-DIG5207SP-S is the flush mounted speaker.

Features

- Chairman unit has priority function, can shut down the speaking unit.
- Chairman unit can initiate and end attendance.
- Chairman unit can initiate 3-key vote (for / abstentions / against), or end the voting.
- Capacitive touch buttons, no buttons pressing sound, long operating life of the buttons, waterproof design.
- Support to use in combination.
- The loudspeaker with strong directivity, HD loud and crear noice and the suppression of the whistles.
- Support 31+1 simultaneous interpretation.
- Support three vote modes:
  A) voting: agree with / abstentions / against.
  B) election / survey modes: 1/2/3/4/5.
  C) response mode / review mode: --、-、0、+、++.

Specifications

The parameter name		CR-DIG5202/04C1-S
Power supply		The controller power supply
Signal-to-noise ratio		›80dB
Total harmonic distortion		‹0.05%
Maximum power dissipation		1.1W
The microphone parameters	Cartridge type	Capacitive heart type single direction
	Sensitivity	-46dBV/pa
	Frequency response	20Hz-20KHz
	Input impedance	2.2K
Frequency response		20Hz-20KHz
Channel crosstalk		›80dB
Headphone output	Earphone load	›8 ohm
	The earphone volume	10mW
Unit interface		8 core aviation head
Color		Black

The parameter name	CR-DIG5202/04C2-S
Power supply	The controller power supply
Maximum power dissipation	1.5W
Unit interface	8 core aviation head
Color	Black

The parameter name		CR-DIG5206CH-S
Power supply		The controller power supply
Frequency response		20Hz-20KHz
Signal-to-noise ratio		›80dB
Channel crosstalk		›80dB
Total harmonic distortion		‹0.05%
Maximum power dissipation		1.1W
Headphone output	Earphone load	›8 ohm
	The earphone volume	10mW
Unit interface		8 core aviation head
Color		Black

The parameter name	CR-DIG5207SP-S
Maximum power dissipation	2W
Color	Black

System connection diagram

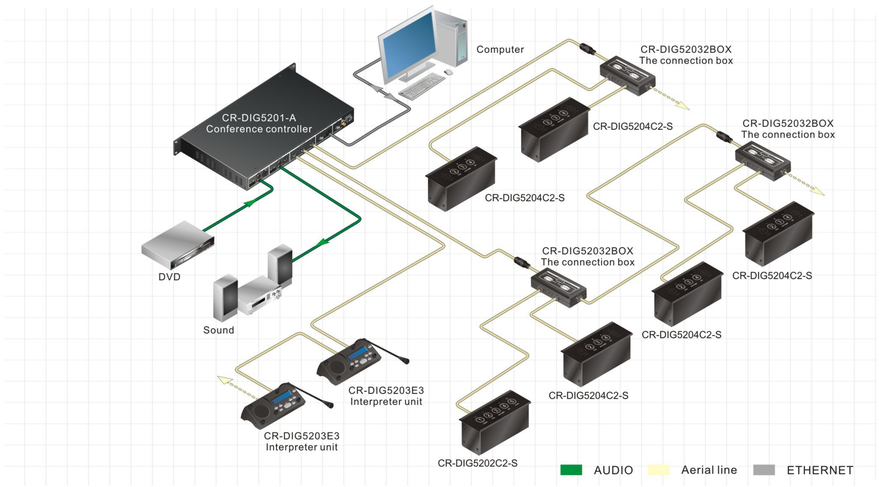

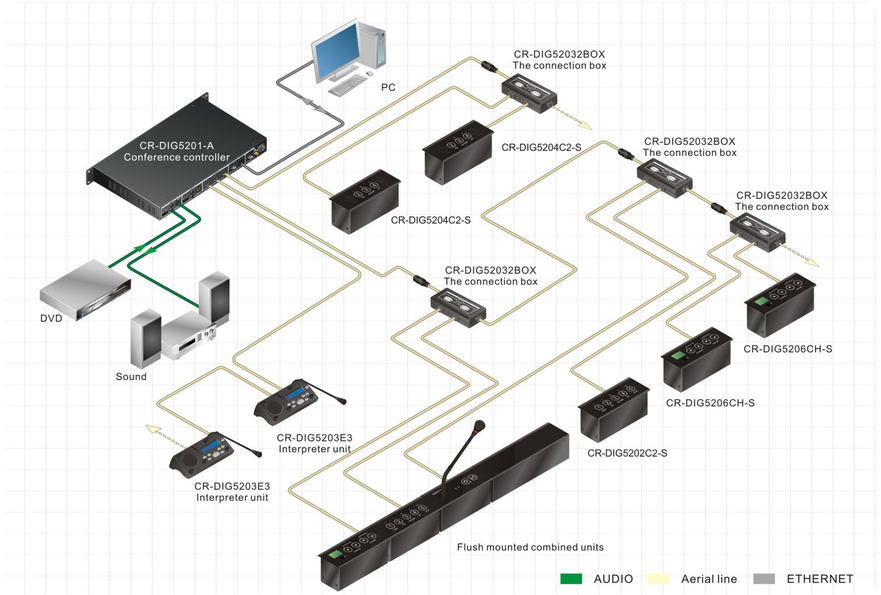

Wireframe view

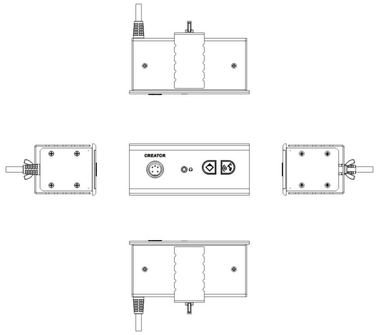

The appearance size of the product (mm): 140(L)x60(W)X61(H)
Desktop hole size (mm): 137(L)x53(W)

CR-DIG5202/04C1-S

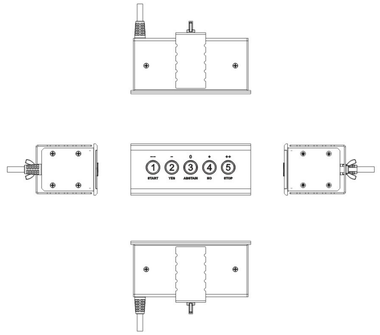

The appearance size of the product (mm): 140(L)x60(W)X61(H)
Desktop hole size (mm): 137(L)x53(W)

CR-DIG5202/04C2-S

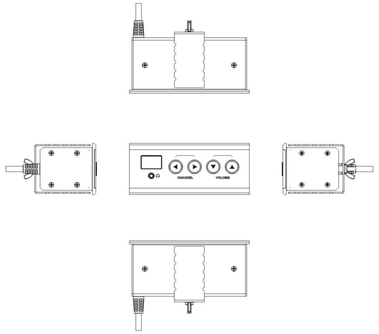

The appearance size of the product (mm): 140(L)x60(W)X61(H)
Desktop hole size (mm): 137(L)x53(W)

CR-DIG5206CH-S

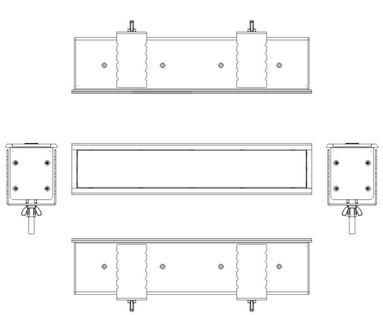

The appearance size of the product (mm): 280(L)x60(W)X61(H)
Desktop hole size (mm): 277(L)x53(W)

CR-DIG5207SP-S