

# CR-DIG5203E3


## Full digital interpreter unit




CR-DIG5203E3

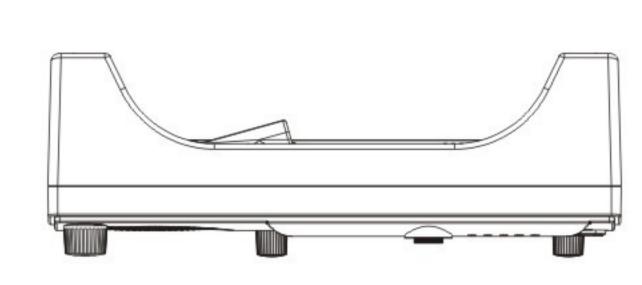



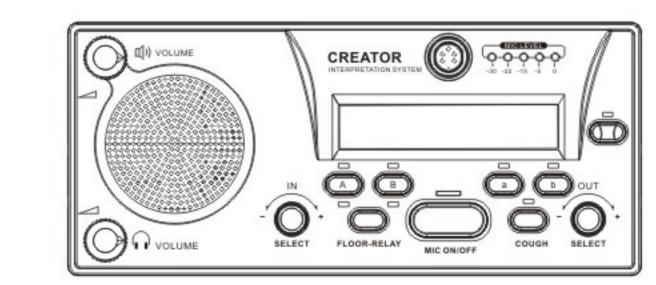

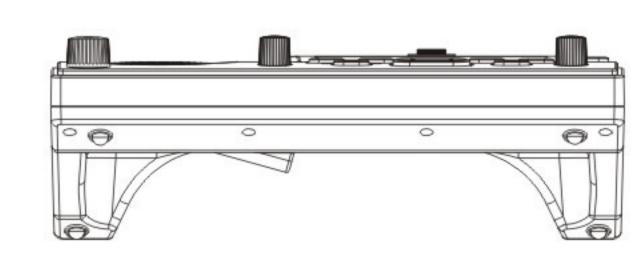

Size (mm): 290 (L) X128 (W) X86. 6 (H)

#### Product overview

CR-DIG5203E3 is a fully functional translation unit. It can simultaneously realize 31+1 language simultaneous translation, direct translation and indirect translation functions.

#### **Features**

- Digital audio technology, built-in high-speed DSP processing.
- 20Hz-20KHz perfect sound.
- Blue 320x64 LCD screen.
- Heart-shaped directivity capacitance pickup, with double color indicating light, speaking as red.
- With 2 meters of cable.
- The knob type plug rod.
- With loudspeaker, earphone jack and a volume adjusting knob.
- With indirect translation and direct translation functions.
- Internal communication.
- Short message.
- Tea application.
- With the cough relieving function.
- Can be set as the operator.
- With two groups of the headset microphone and earphone interfaces.
- The speaker and the headset's volume should be regulated alone.
- Support the headset microphone and plug rod microphone.
- The volume size indication function.
- Input channel shortcuts.
- Output channel shortcuts.
- The timing function.
- Translation unit number almost unlimited.

### Specifications -

The parameter name		CR-DIG5203E3
Power supply		The controller power supply or DC24V input
Frequency response		20Hz-20KHz
Signal-to-noise ratio		>80dB
Channel crosstalk		>80dB
Total harmonic distortion		<0.05%
Maximum power dissipation		1.8W
The microphone parameters	one Cartridge type	Capacitive heart type single direction
	Sensitivity	-46dBV/pa
	Frequency response	20Hz-20KHz
	Input impedance	2.2K
Power of loudspeaker		2W
Headphone output Earphone load  The earphone volume		>8 ohm
		10mW
Display	Control display	320?64 dot matrix (blue white)
Unit interface		8 core aviation head
Color		Dark grey

# System connection diagram CR-DIG52032BOX The connection box CR-DIG52032BOX CR-DIG5201-A The connection box CR-DIG52032BOX The connection box CR-DIG5204B2 Delegate unit Remote video CR-DIG5204B2 Delegate unit CR-DIG5203E3 CR-DIG5204B2 Delegate unit CR-DIG5203E3 Interpreter unit CR-DIG5202B2 Chairman unit Aerial line ETHERNET

www. creator1997.com